


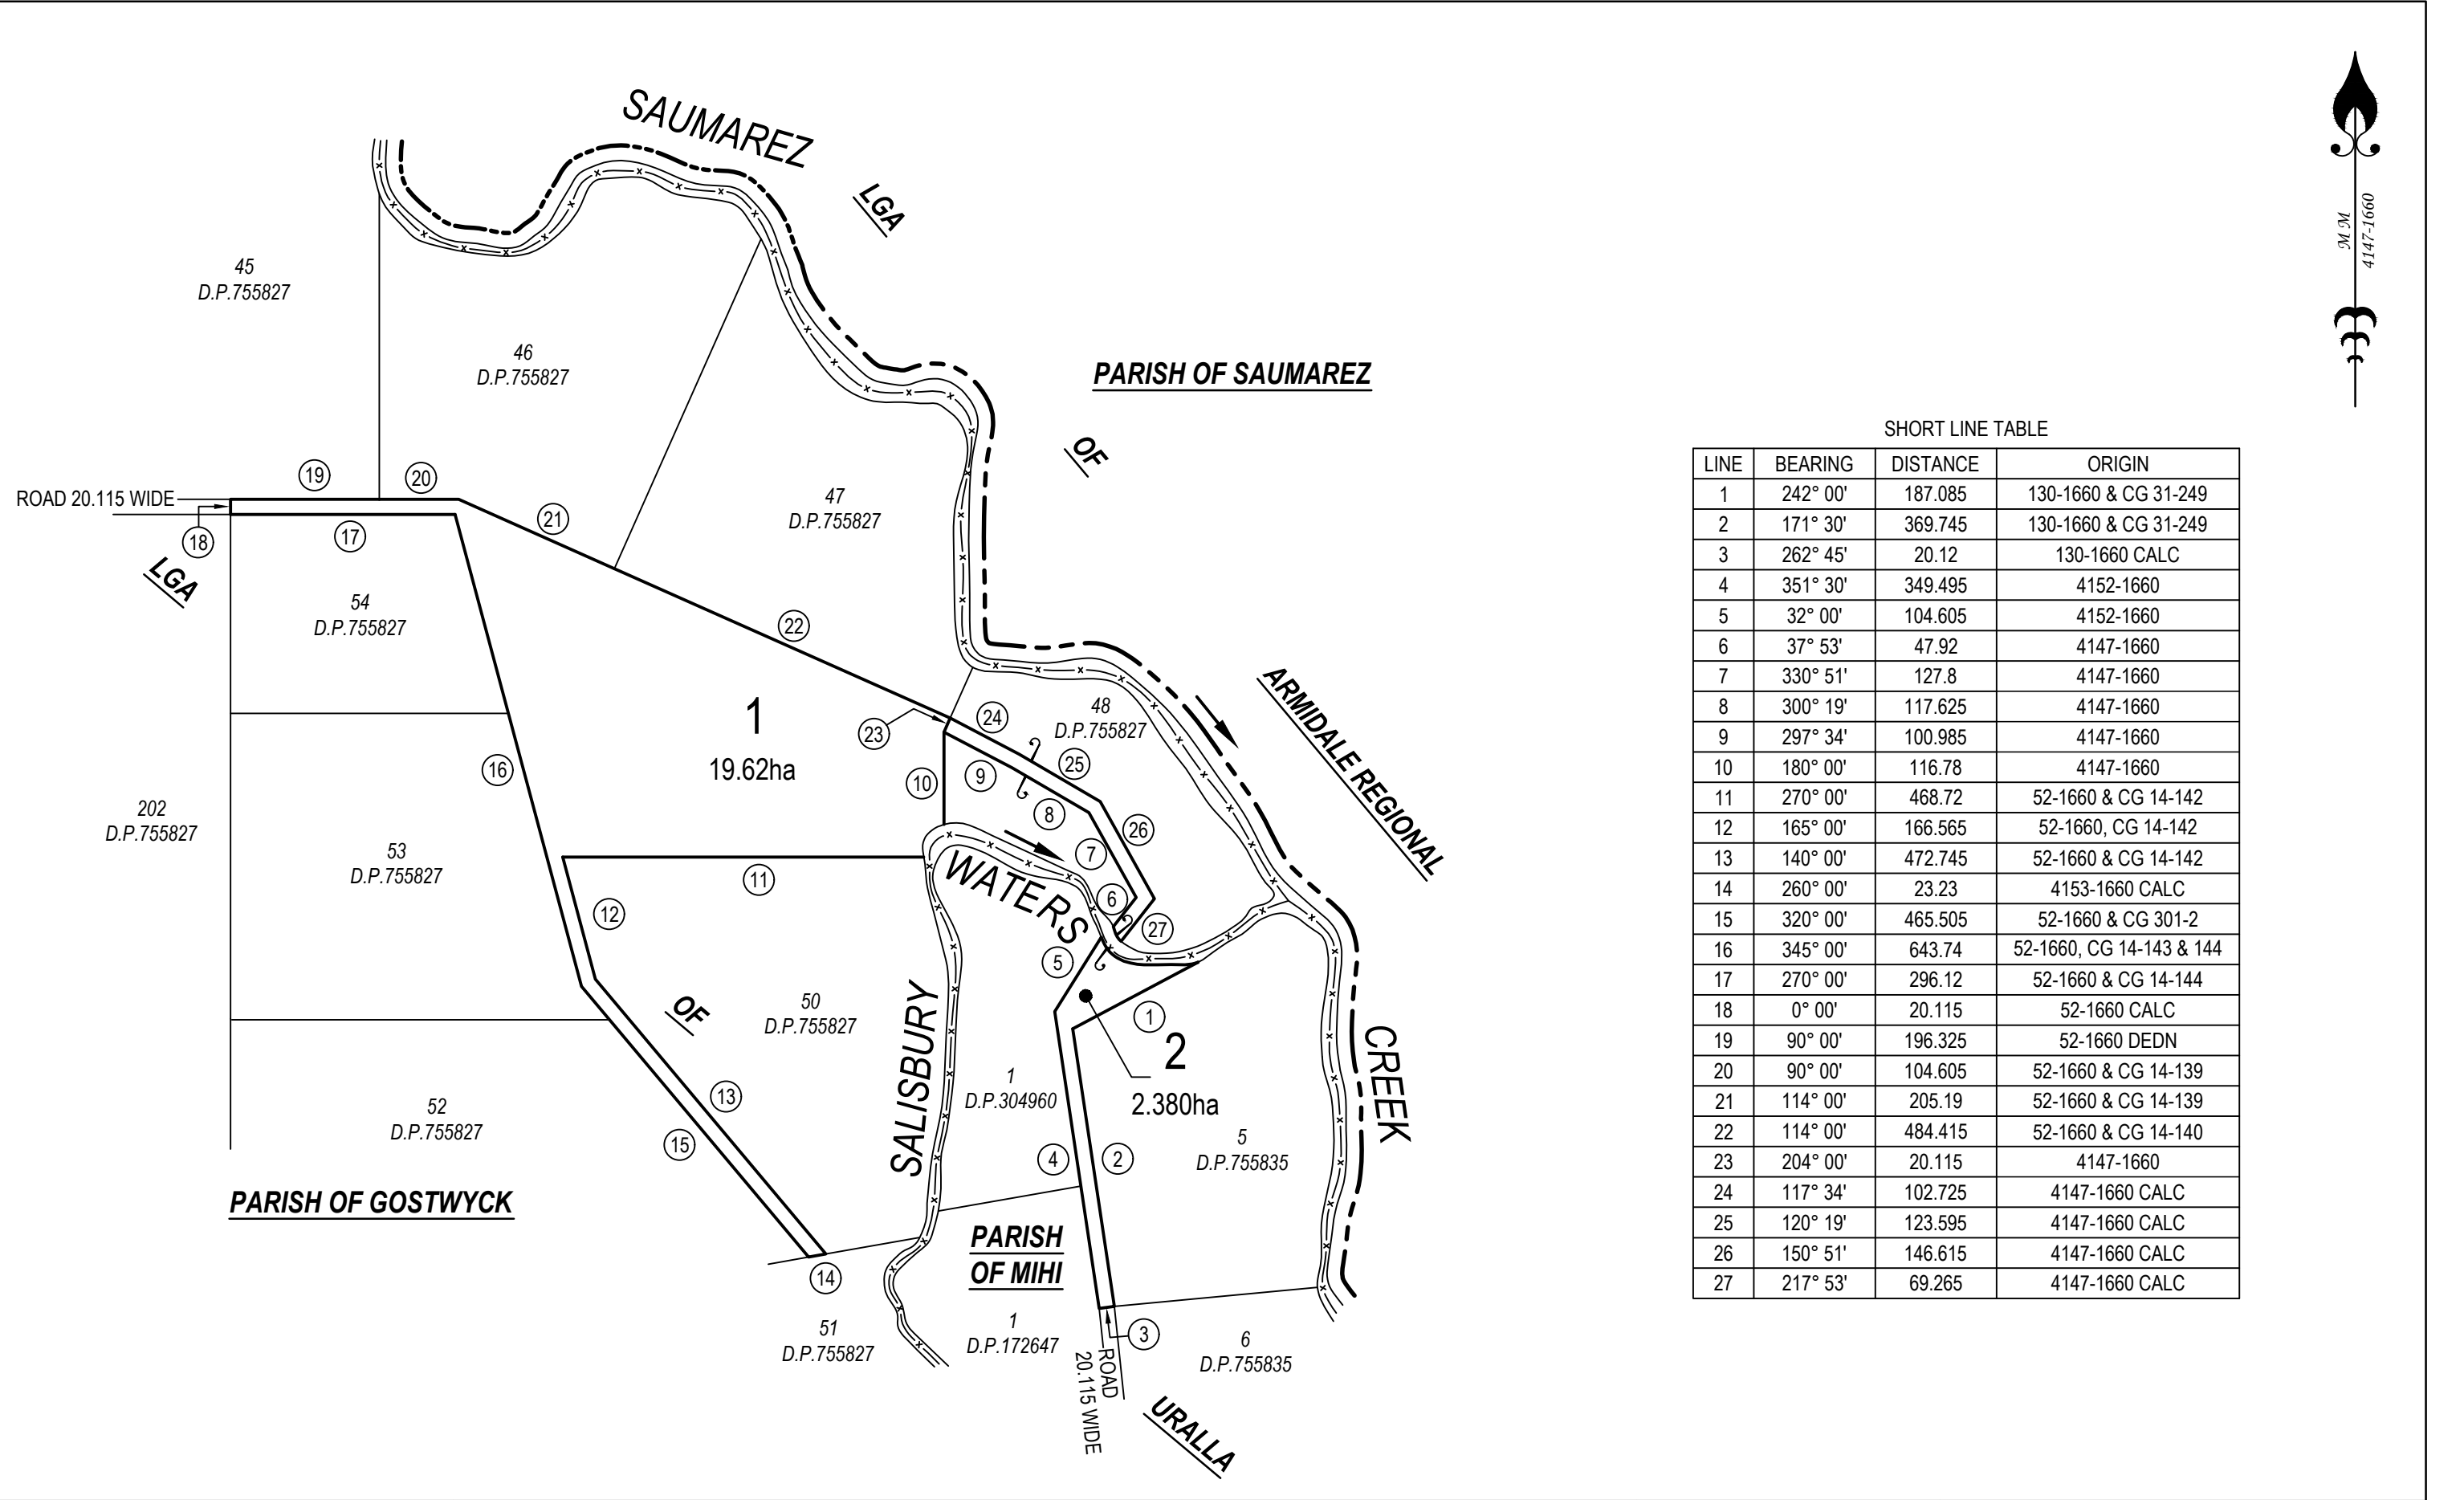

SHORT LINE TABLE			
LINE	BEARING	DISTANCE	ORIGIN
1	242° 00'	187.085	130-1660 & CG 31-249
2	171° 30'	369.745	130-1660 & CG 31-249
3	262° 45'	20.12	130-1660 CALC
4	351° 30'	349.495	4152-1660
5	32° 00'	104.605	4152-1660
6	37° 53'	47.92	4147-1660
7	330° 51'	127.8	4147-1660
8	300° 19'	117.625	4147-1660
9	297° 34'	100.985	4147-1660
10	180° 00'	116.78	4147-1660
11	270° 00'	468.72	52-1660 & CG 14-142
12	165° 00'	166.565	52-1660, CG 14-142
13	140° 00'	472.745	52-1660 & CG 14-142
14	260° 00'	23.23	4153-1660 CALC
15	320° 00'	465.505	52-1660 & CG 301-2
16	345° 00'	643.74	52-1660, CG 14-143 & 144
17	270° 00'	296.12	52-1660 & CG 14-144
18	0° 00'	20.115	52-1660 CALC
19	90° 00'	196.325	52-1660 DEDN
20	90° 00'	104.605	52-1660 & CG 14-139
21	114° 00'	205.19	52-1660 & CG 14-139
22	114° 00'	484.415	52-1660 & CG 14-140
23	204° 00'	20.115	4147-1660
24	117° 34'	102.725	4147-1660 CALC
25	120° 19'	123.595	4147-1660 CALC
26	150° 51'	146.615	4147-1660 CALC
27	217° 53'	69.265	4147-1660 CALC