

Park Street

The builder is to confirm all dimensions, site levels and conditions on site prior to the commencement of construction or the ordering of materials

All internal stud walls to be 70mm wide treated pine




2

Floor Plan

1 : 100

'Cantaport' Model KCR-PJR5830 single carport installed to manufacturer's specification

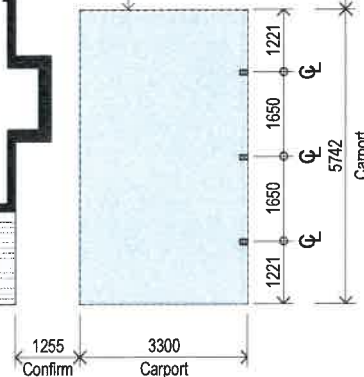

NOTES:

- All dimensions are in millimetres unless noted otherwise.
All levels and site conditions are to be confirmed on site prior to the ordering of materials or commencement of construction.
- All work is to be carried out in accordance with the National Construction Code (NCC) and the relevant Australian design standards.
All timber framework to AS1684.
All concrete slabs and footings to AS2870 and Engineer's specification.



MARSHALL
DRAFTING SERVICES
20 Kuranda Avenue
Armidale NSW 2350
M: 0438 770 279
E: marshalldrafting@gmail.com

No.	Description	Date
A	Preliminary Issue	04.10.22
B	Client Issue	13.10.22
C	Client Issue	15.10.22
F	Client Issue	14.02.23

THE BUILDER IS TO LOCATE ALL EXISTING SERVICES AND VERIFY LEVELS AND DIMENSIONS ON SITE BEFORE COMMENCING ANY EXCAVATION OR BUILDING WORKS.

THE BUILDING WORKS WILL COMPLY WITH THE RELEVANT SECTIONS OF THE NATIONAL CONSTRUCTION CODE AND BE CONSTRUCTED IN ACCORDANCE WITH THE WORKING DRAWINGS, THE ENGINEER'S DRAWINGS AND SPECIFICATIONS.

THIS DOCUMENT IS SUBJECT TO COPYRIGHT AND REMAINS THE PROPERTY OF MARSHALL DRAFTING SERVICES
ABN 15 678 662 718

M. Parkes & G. Noone

Proposed carport

13 Park Street,
Uralla NSW 2358

Site Plan, Floor Plan & Notes

Project Number	22149	WD-01	F
Date	01/10/2022		
Drawn by	C. Marshall	Scale	As indicated
Checked by	C. Marshall		